



Artist T4 Full Range Speaker

Artist T4 full-range loudspeaker adopts customized neodymium speaker, delivering high SPL with a very compact size cabinet.

Artist T4 is made with switch tap for 70V/100V output and impedance output. This allows T4 with more applications.

Artist T4 adopts unique T-eye™ design, using two dome tweeters, and the array layout is assembled in the center front of the speaker, which makes the speaker with wider frequency response, larger near-field coverage and smoother sound.


Artist T4 is equipped with a wall mount bracket to adjust the angle horizontally and vertically.

Artist T3 Full Range Speaker


Artist T3 full-range loudspeaker adopts customized speaker, delivering high SPL with a very compact size cabinet.

Artist T3 is equipped with a wall mount bracket to adjust the angle horizontally and vertically.

⊙ Artist T4 Frequency Response Curve

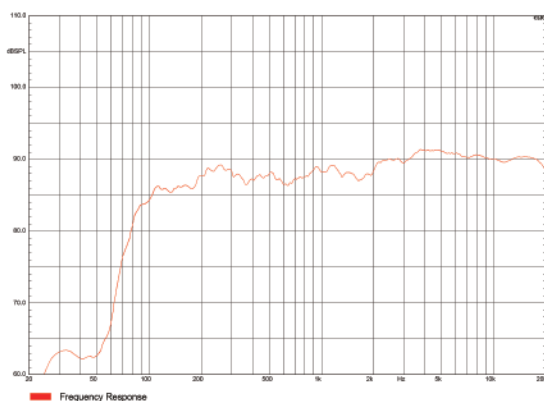

⊙ Artist T3 Frequency Response Curve

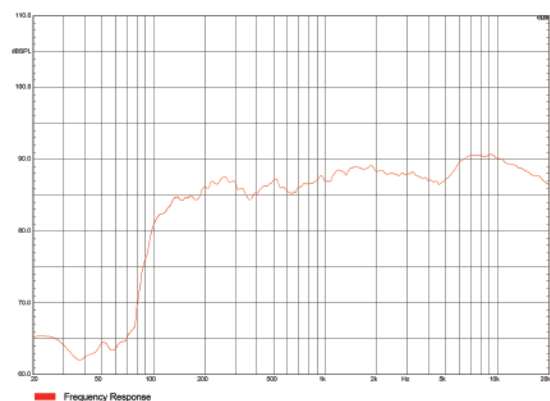

	Frequency Response (-10dB)	Coverage Angle (HxV)	Impedance Power	70/100V Power	Maximum Calculated SPL/1M (Continuous/Peak)	Rated Impedance	Cabinet Color	Dimension (WxHxD)	Net Weight
Artist T4	110Hz-20kHz	110°x100°	60W	70V 20W/10W/5W/2.5W 100V 20W/10W/5W	110dB/116dB	16Ω	Black	154x174x158mm	2.5kg
Artist T3	120Hz-20kHz	110°x100°	40W	/	107dB/113dB	8Ω	Black	121x133x138mm	1.0kg

Black is standard and default color. Consult with Audiocenter sales team for other customized colors.